

### 特徴 / Features

- 小型軽量化しております。
- 低うなり音

- ★It is smaller and lighter.
- ★Low beat sound


### 規格 / Specifications

使用温度範囲 Temp. range	-40~85°C (+110°C)※1
定格電圧 Rated voltage	450Vdc
静電容量 Capacitance	0.47~2.2μF
静電容量許容差 Cap. tolerance	±10% (K)
誘電正接 Tangent of loss angle	0.0020 <sub>off</sub> T <sub>ess</sub> (at 1kHz)
耐電圧 Voltage Proof	WV×150% 60sec
絶縁抵抗 Insulation resistance	7,500Ω F <sub>off</sub> T <sub>more</sub> (100V. dc/1 min)
高温負荷 Endurance	85°C 500Vdc 1000hr印加 ΔC/C ±10% <sub>off</sub> T <sub>in</sub> tan δ 0.006 <sub>off</sub> T <sub>ess</sub> IR 1,000Ω F <sub>off</sub> T <sub>more</sub>
耐湿負荷 Damp heat	60°C 95%RH 450Vdc 500hr印加 ΔC/C ±10% <sub>off</sub> T <sub>in</sub> tan δ 0.003 <sub>off</sub> T <sub>ess</sub> IR 1,000Ω F <sub>off</sub> T <sub>more</sub>

※1 ( ) 温度は電圧軽減による使用可能範囲です。

※1 ( ) Marked temperature shows operatable when voltage is derated.

### 寸法 / Dimensions (mm)

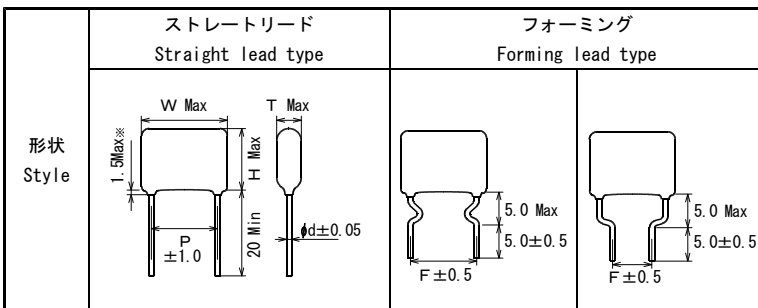

Cap CODE	Cap (μF)	EDP CODE	MPW (Z) 450Vdc												
			基準収納数 NUMBER OF PIECES FOR PACKING UNIT												
			テーピング Taping		ロング Long		フォーミング Formed		Ammo		Bag		Box		
			W	H	T	P	F	φ d	F=5.0	F=7.5	Bag	Box	Bag	Box	
474	0.47	01Z9	12.5	11.7	4.6	10.0	5.0/7.5/10.0	0.6	500	500	100	500	100	500	
684	0.68	01Z9	12.5	13.5	5.3	10.0	5.0/7.5/10.0	0.6	500	500	100	500	100	500	
105	1.0	01Z9	12.5	14.8	6.2	10.0	5.0/7.5/10.0	0.6	500	500	100	500	100	500	
155	1.5	01Z9	12.5	17.5	7.8	10.0	5.0/7.5/10.0	0.6	400	300	100	500	100	500	
225	2.2	01Z9	12.5	18.4	10.2	10.0	5.0/7.5/10.0	0.8			100	500	100	500	